


- This document applies to the Yaskawa GPD515/G5, F7, G7 and P7 drives.
- Unpack the *DeviceNet Option (CM05x)* and verify that all components are present and undamaged. Check the EPROM label to verify that the *DeviceNet Option (CM05x)* card is the correct card for the drive.

Drive	Kit Number	Option Board Number	EPROM Label Designation	Qty.
G5	CM053	46S03318-001x	VST80007x	1
F7	CM056	46S03318-002x	VST80003x	1
G7	CM057	46S03318-003x	VST80004x	1
P7	CM058	46S03318-004x	VST80005x	1
DeviceNet Option (CM05x) Installation Guide (IG.AFD.14)				1



- Connect power to the drive and verify that the drive functions correctly. This includes running the drive from the operator keypad. Refer to the appropriate drive technical manual for information on connecting and operating the drive.
- Remove power from the drive and wait for the charge lamp to be completely extinguished. Wait at least five additional minutes for the drive to be completely discharged. Measure the DC BUS voltage and verify that it is at a safe level.

- Remove the operator keypad and drive cover.
 - Remove the operator keypad and loosen any screws on the front of the terminal cover. Simultaneously pushing the locking tabs on the bottom right and left sides of the terminal cover inward, pull the bottom edge of the terminal cover outward.
 - Loosen any screws on the front of the control cover. Simultaneously pushing the locking tabs on the bottom right and left sides of the control cover inward, pull the bottom edge of the control cover outward. The drive control card should be visible.
 - Remove the option card hold-down on the left side of the drive case by carefully compressing the top and bottom until it becomes free of its holder. Lift it out.

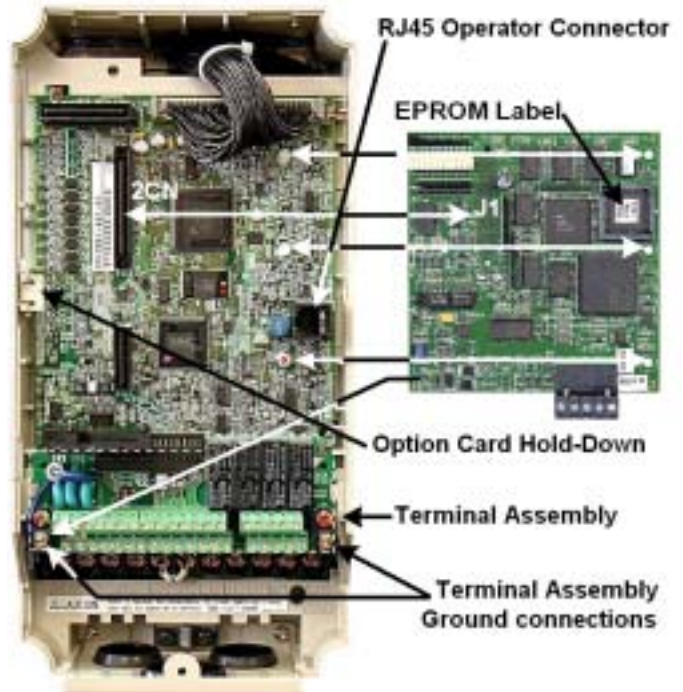

- Mount the *DeviceNet Option (CM05x)* on the drive.
 - Align the J1 connector on the back of the *DeviceNet Option (CM05x)* with its mating 2CN connector on the drive control card.
 - Align the three standoffs on the front of the drive control board with the three holes on the right side of the *DeviceNet Option (CM05x)*.
 - Press the *DeviceNet Option (CM05x)* firmly onto the drive 2CN connector and standoffs until the J1 connector is fully seated on 2CN and the drive standoffs have locked into their appropriate holes.
 - Replace the option card hold down.
 - Connect the ground wire from the ground terminal E on the option card to a ground terminal on the terminal assembly.

- Apply power to the drive and verify that the drive functions correctly.

Mounting the *DeviceNet Option* on an F7 drive

- Connect to the DeviceNet network as shown in the figure to the right.

Terminal	Name	Wire Color	Description
1	V-	Black	Communication GND
2	CAN_L	Blue	CAN Data Low
3	Shield	Bare	Cable Shield
4	CAN_H	White	CAN Data High
5	V+	Red	Communications +24Vdc




Set the *DeviceNet Option (CM05x)* Baud Rate

Set the Baud Rate for the *DeviceNet Option (CM05x)* to the network baud rate by setting DIP switches 1 and 2 as shown in the figure to the right. The baud rate must match the baud rate of the DeviceNet master (PC/PLC/Scanner) in order for the connection to function properly.

Set the *DeviceNet Option (CM05x)* MAC ID

Set the MAC ID of *DeviceNet Option (CM05x)* by setting DIP switches 3 through 8 as shown in the table below. Each device on the network must have a unique MAC ID, typically between 3 and 62. Addresses 0 and 1 are usually reserved for DeviceNet masters, address 2 for diagnostic/monitoring equipment and address 63 for vendor specific functions in some systems. Check the network schematic to verify the MAC ID setting.

Sw	MAC ID																															
	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1
6	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
7	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
8	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

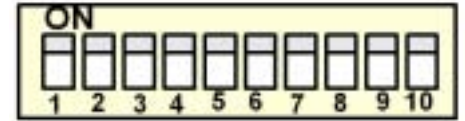

Sw	Baud Rate			
	125kbps	250kbps	500kbps	N/A
1	0	0	1	1
2	0	1	0	1

Sw	State	Function
9	0	Always Set to 0
	1	Reserved

Master Idle Operation		
Sw	State	Function
10	0	EF0 Disabled
	1	EF0 Enabled

A DeviceNet master is placed in "idle" mode if it remains connected but stops communicating. Sw 10 setting determines the drive response to a master in "idle" mode.


Sw	MAC ID																														
	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62
3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
6	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	0	0	0	0	1	1	1	1
7	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1
8	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0

Verify LED Status

Refer to the table on the following page for a complete listing of LED states.

LED Power-Up Sequence		
LED	Color	Condition
MS	Green	On for 0.25 sec
MS	Red	On for 0.25 sec
MS	Green	On for 0.25 sec
NS	Green	On for 0.25 sec
NS	Red	On for 0.25 sec

LED normal operation Status		
LED	Condition	
MS	Green	
NS	Flash Green (No Communication)	
	Green (Communicating)	

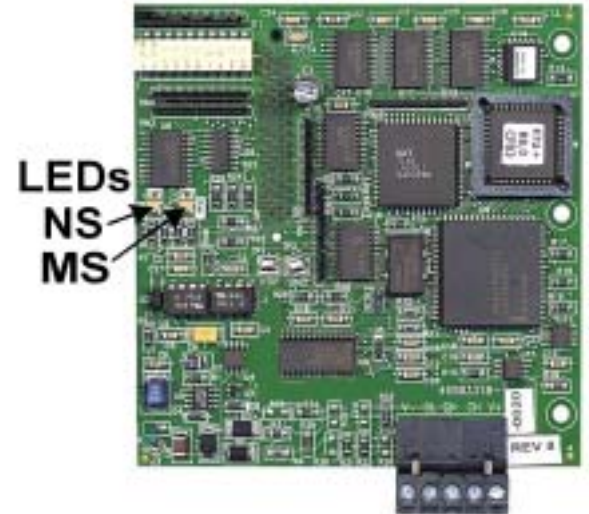

Remove power from the drive and wait for the charge lamp to be completely extinguished. Wait at least five additional minutes for the drive to be completely discharged. Measure the DC BUS voltage and verify that it is at a safe level.

Reinstall all drive covers and the operator keypad. Apply power to the drive.

Set parameters b1-01 and b1-02 to their appropriate values. Refer to the table to the right for available b1-01 and b1-02 values.

Param	Function	Data	+/- Limits - Description	Dflt
b1-01	Reference Selection	0	Digital Operator	1
		1	Terminals	
		2	Serial Communication	
		3	Option PCB (DeviceNet Option)	
b1-02	Operation Method Selection	0	Digital Operator	1
		1	Terminals	
		2	Serial Communication	
		3	Option PCB (DeviceNet Option)	

Install the EDS File and Configure the Drive on the DeviceNet Network

The EDS file can be obtained from the CD that was included with the drive or downloaded from www.drives.com. It is recommended that the EDS file be downloaded from www.drives.com to be sure that the latest version is used. Install the EDS file into the DeviceNet configuration tool (i.e. RSNetworx® for DeviceNet). There is a separate EDS file for each drive model, verify that the correct EDS file has been installed for the drive model configured. Refer to the documentation that came with the master configuration tool for information on installing EDS files and configuring a DeviceNet node.

Note: The EDS files located on the CD or downloaded from www.drives.com will be in “zip” format and will need to be un-zipped to a temporary directory prior to installation.

LED Status Indicators and Diagnostics

MS LED	Condition	Solution
Off	Power Off	<ul style="list-style-type: none"> ■ Check the drive main circuit wiring ■ Check the connection of the option board to the 2CN connector on the drive ■ Turn power on
Flashing Red	Minor Fault	<ul style="list-style-type: none"> ■ Check network termination ■ Check network wiring ■ Check baud rate ■ Check that the communication bus wiring is separated from the main circuit wiring
Solid Red	Unrecoverable Fault.	<ul style="list-style-type: none"> ■ Check if MAC ID is unique per the network ■ Check baud rate ■ Check if the master is correctly configured ■ Check if the termination resistors are correctly connected to the communication bus ■ Check if the communication device is correctly connected per wiring diagrams ■ Check if the communication bus wiring is separated from the main circuit wiring
Flashing Green	In Standby	<ul style="list-style-type: none"> ■ Check that the DeviceNet master has been configured for the drive
Solid Green	Normal – Communicating	-

NS LED	Condition	Solution
Off	Power Off	<ul style="list-style-type: none"> ■ Check the drive main circuit wiring ■ Check the connection of the option board to the 2CN connector on the drive ■ Turn power on
	Incomplete Initialization	<ul style="list-style-type: none"> ■ Wait for initialization to complete
Flashing Red	Connection Time-Out	<ul style="list-style-type: none"> ■ Check that the DeviceNet master is connected and on-line
Solid Red	Critical Link Failure	<ul style="list-style-type: none"> ■ Check if MAC ID is unique per the network ■ Check baud rate ■ Check that the DeviceNet master is configured correctly ■ Check that the termination resistors are correctly installed at the ends of the communication bus ■ Check that the communications bus is not terminated any place other than at the ends ■ Check that the drive is correctly connected per wiring diagrams ■ Check that the communication bus wiring is separated from the main circuit wiring
Flashing Green	Normal – Not Communicating	<ul style="list-style-type: none"> ■ DeviceNet master is in “idle” mode ■ Send an explicit or I/O message from the master as necessary
Solid Green	Normal – Communicating	-

Copies of this Installation Guide along with all technical manuals in “.pdf” format and support files may be obtained from either the CD supplied with the drive or from www.drives.com. Printed copies of any Yaskawa manual may be obtained by contacting the nearest Yaskawa office. Information on DeviceNet may be obtained from www.ODVA.org

Reference documents:

G5 Technical Manual – TM.4515
GPD515/G5 MODBUS® Technical Manual – TM.4025
F7 Drive User Manual – TM.F7.01
F7 Drive Programming Manual – TM.F7.02
F7 Drive Parameter Access Technical Manual – TM.F7.11
G7 Drive Technical Manual – TM.G7.01
P7 Drive User Manual – TM.P7.01
P7 Drive Programming Manual – TM.P7.02
DeviceNet Option (CM05x) Installation Guide – IG.AFD.14
F7, G7, P7 DeviceNet Option (CM05x) Technical Manual – TM.AFD.14
G5 DeviceNet Option (CM053) Technical Manual – TM4556

DeviceNet™ is a trademark of the ODVA

RSNetworx® is a registered trademark of Rockwell Automation

GPD is a trademark of Yaskawa, Inc.

YASKAWA ELECTRIC AMERICA, INC.

Drives Division
16555 W. Ryerson Rd., New Berlin, WI 53151, U.S.A.
Phone: (800) YASKAWA (800-927-5292) Fax: (262) 782-3418
Internet: <http://www.drives.com>

YASKAWA ELECTRIC AMERICA, INC.

Chicago-Corporate Headquarters
2121 Norman Drive South, Waukegan, IL 60085, U.S.A.
Phone: (800) YASKAWA (800-927-5292) Fax: (847) 887-7310
Internet: <http://www.yaskawa.com>

MOTOMAN INC.

805 Liberty Lane, West Carrollton, OH 45449, U.S.A.
Phone: (937) 847-6200 Fax: (937) 847-6277
Internet: <http://www.motoman.com>

YASKAWA ELECTRIC CORPORATION

New Pier Takeshiba South Tower, 1-16-1, Kaigan, Minatoku, Tokyo, 105-0022, Japan
Phone: 81-3-5402-4511 Fax: 81-3-5402-4580
Internet: <http://www.yaskawa.co.jp>

YASKAWA ELETRICO DO BRASIL COMERCIO LTDA.

Avenida Fagundes Filho, 620 Bairro Saude Sao Paulo-SP, Brasil CEP: 04304-000
Phone: 55-11-5071-2552 Fax: 55-11-5581-8795
Internet: <http://www.yaskawa.com.br>

YASKAWA ELECTRIC EUROPE GmbH

Am Kronberger Hang 2, 65824 Schwalbach, Germany
Phone: 49-6196-569-300 Fax: 49-6196-888-301

MOTOMAN ROBOTICS AB

Box 504 S38525, Torsas, Sweden
Phone: 46-486-48800 Fax: 46-486-41410

MOTOMAN ROBOTEC GmbH

Kammerfeldstrabe 1, 85391 Allershausen, Germany
Phone: 49-8166-900 Fax: 49-8166-9039

YASKAWA ELECTRIC UK LTD.

1 Hunt Hill Orchardton Woods Cumbernauld, G68 9LF, Scotland, United Kingdom
Phone: 44-12-3673-5000 Fax: 44-12-3645-8182

YASKAWA ELECTRIC KOREA CORPORATION

Paik Nam Bldg. 901 188-3, 1-Ga Euljiro, Joong-Gu, Seoul, Korea
Phone: 82-2-776-7844 Fax: 82-2-753-2639

YASKAWA ELECTRIC (SINGAPORE) PTE. LTD.

Head Office: 151 Lorong Chuan, #04-01, New Tech Park Singapore 556741, Singapore
Phone: 65-282-3003 Fax: 65-289-3003

TAIPEI OFFICE (AND YATEC ENGINEERING CORPORATION)

10F 146 Sung Chiang Road, Taipei, Taiwan
Phone: 886-2-2563-0010 Fax: 886-2-2567-4677

YASKAWA JASON (HK) COMPANY LIMITED

Rm. 2909-10, Hong Kong Plaza, 186-191 Connaught Road West, Hong Kong
Phone: 852-2803-2385 Fax: 852-2547-5773

BELJING OFFICE

Room No. 301 Office Building of Beijing International Club,
21 Jianguomanwai Avenue, Beijing 100020, China
Phone: 86-10-6532-1850 Fax: 86-10-6532-1851

SHANGHAI OFFICE

27 Hui He Road Shanghai 200437 China
Phone: 86-21-6553-6600 Fax: 86-21-6531-4242

SHANGHAI YASKAWA-TONJIM & E CO., LTD.

27 Hui He Road Shanghai 200437 China
Phone: 86-21-6533-2828 Fax: 86-21-6553-6677

BELJING YASKAWA BEIKE AUTOMATION ENGINEERING CO., LTD.

30 Xue Yuan Road, Haidian, Beijing 100083 China
Phone: 86-10-6232-9943 Fax: 86-10-6234-5002

SHOUGANG MOTOMAN ROBOT CO., LTD.

7, Yongchang-North Street, Beijing Economic & Technological Development Area,
Beijing 100076 China
Phone: 86-10-6788-0551 Fax: 86-10-6788-2878

YEA, TAICHUNG OFFICE IN TAIWAN

B1, 6F, No.51, Section 2, Kung-Yi Road, Taichung City, Taiwan, R.O.C.
Phone: 886-4-2320-2227 Fax: 886-4-2320-2239

Data subject to change without notice.